



You will return to the contents of P1 SOIL by clicking the pictogram


# SAMPLING BUILDING MATERIALS

## P1.08

A sample is taken with the Edelman auger.



The sample is weighed on the electronic balance.

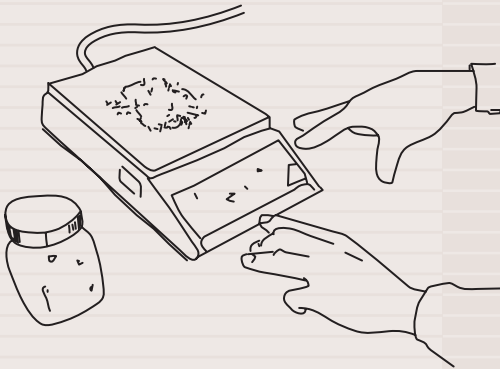

The Building Materials (Soil and Surface Waters Protection) Decree for the Netherlands came into effect on 1 July 1999 for the use of stony materials and earth in construction and other works.

The purpose of the Decree is to prevent the pollution of surface waters, groundwater and soil. Harmful substances leaching from stony building and other materials or contaminated earth can cause pollution.

The Decree is in line with the general thinking on quality and quality control. It includes rules, regulations and standards which guarantee a specified quality of building materials, including earth. The Building Materials Decree affects all parties who play a role in the building process, such as manufacturers and suppliers of building materials (who are exporting to the Netherlands), local authorities, which are responsible for enforcement of the Decree, laboratories which test the environmental quality of building materials, certifying bodies, etc.

Practically this means that all building materials must be certified and for this they must be sampled and tested in a correct way.

Eijkkamp Agrisearch Equipment can supply you with the necessary sampling-, measuring- and sieving equipment.

### 20.06 Set for Building Materials Decree

The set consists of three parts:

- An auger set for sampling till a depth of 10 metres.
- Measuring- and sieving equipment.
- Sampling shovels.

### Auger set

In the auger set are included, amongst others: a handle with all synthetic grip, an Edelman auger combination type in two diameters, a Riverside auger in two diameters, a gouge auger, extension rods and a bent spatula. All equipment can be transported in a carrying bag for field equipment.



Set for the Building Materials Decree

# SAMPLING BUILDING MATERIALS



P1.08

## Measuring- and sieving equipment

The samples can be sieved with the stainless steel sieves. Included in the set are: a lid and bottom, a sieve with galvanized steel plate sieve and a stainless steel wire mesh sieve (aperture 16 mm).

For position determination and measurement of the building materials to be sampled use can be made of the surveying instruments which are included in the set.

For distance measurements the synthetic measuring tape with a length of 50 metres can be used.

The included lightweight, liquid-damped clinometer has an accuracy of 5 degrees on the top scale and 1 degree on the precision scale.

On the percent scale the clinometer has an accuracy of 1% from 0-70% and 2% from 70-150%.

For determination of position a mirror compass is also included in the set.

The included electronic balance has a capacity of 12000 g and an accuracy of 1 g. and a dust and splashwater proof housing. The balance can be operated easily with the 4-key pad and has

a build-in calibration program.

The dimensions of the stainless steel weighing plate are 230 x 180 mm. The balance is supplied with a mains adapter 230 V/50 Hz.

## Sampling shovels

The included sampling shovels (with extra grip) are specifically suited to sample loose discharged materials (granulates). The dimensions of the sampling shovels are resp. 12x12x12, 18x18x18 and 24x24x24 cm.

Eijkelkamp Agrisearch Equipment can supply more optional items from the broad range of hand augers, core samplers, balances, sieves and surveying equipment.

**A sample is taken with the sampling shovel.**



Synthetic measuring tape



Electronic balance



Clinometer



Sampling shovels



## PARTS LIST

Art.no.	Description	Qty. in set	Art.no.	Description	Qty. in set
<b>P1.08</b>	<b>Sampling building materials</b>		**20.06.12	Sampling shovel for building materials decision, stainless steel, dim. 12x12x12 cm, with extra grip	1
	<b>We supply a complete test kit for sampling and testing building materials (according to Dutch Building Materials Decree).</b>		**20.06.18	Sampling shovel for building materials decision, stainless steel, dim. 18x18x18 cm, with extra grip	1
<b>20.06</b>	<b>Set for Building Materials Decree, consisting of:</b>		**20.06.24	Sampling shovel for building materials decision, stainless steel, dim. 24x24x24 cm, with extra grip	1
	<b>- auger set for sampling till 10 m depth</b>				
	<b>- measuring and sieving equipment</b>				
	<b>- sampling shovels</b>				
**01.14	Carrying bag for field equipment, with two shoulder straps (backpack model), (inside) Ø 17x150 cm	1			
**01.10.17.B	Handle, normal, 60 cm, with all synthetic, detachable grip (incl. coupling sleeve), bay.	1			
**01.02.02.07.B	Edelman auger, bottom part, comb.type, bay., Ø 7 cm	1			
**01.02.02.05.B	Edelman auger, bottom part, comb.type, bay., Ø 5 cm	1			
**01.04.00.07.B	Riverside auger, bottom part, bay., Ø 7 cm	1			
**01.04.00.05.B	Riverside auger, bottom part, bay., Ø 5 cm	1			
**04.02.01.30.B	Gouge auger, bottom part, op. length 50 cm, bay., Ø 30 mm	1			
**04.05.01.20	Bent spatula, b				
**01.10.07.B	Extension rod, 100 cm (incl. coupling sleeve) bay.	9			
**98.02.05	Electronic balance, capacity 12000 g, readability 1 g, mains adaptor 230V, battery 9V (not standard included).Dimension stainless steel platform 230x180 mm. Incl. protective cover	1			
**99.80.03	Battery, 9 V	1			
**08.05.03.03.01	Stainless steel receiver, Ø 300 mm, height 55 mm	1			
**08.05.03.03.02	Stainless steel lid, Ø 300 mm	1			
**08.05.02.13.09	Plate sieve with stainless steel rim, Ø 300 mm, rim size 55 mm, with galvanized steel sieve plate, perture 16.00 mm	1			
**08.05.02.03.38	Stainless steel wire mesh sieve, Ø 300 mm, rim size 55 mm, aperture 16.00 mm	1			
**17.20.01.50	Fibre glass measuring tape in metal frame, length 50 m, tape width 16 mm, graduation in cm	1			
**17.27	Clinometer, liquid damped handclinometer, with a builtin parallaxfree lens, read-out in % or degrees (360° system), accuracy: top scale 5 °, the precision scales 1 ° and on %-scale 1% by 0-70% and 2% by 70-150%, in bag	1			
**17.33	Mirror compass MC-2, liquid damped compass, with declination adjustment system and clinometer, scale 360 deg.	1			
**99.10.01	Carrying case, synthetic, incl. lockable lid and 3 exchangeable compartments, dimensions 600x400x340 mm	1			